
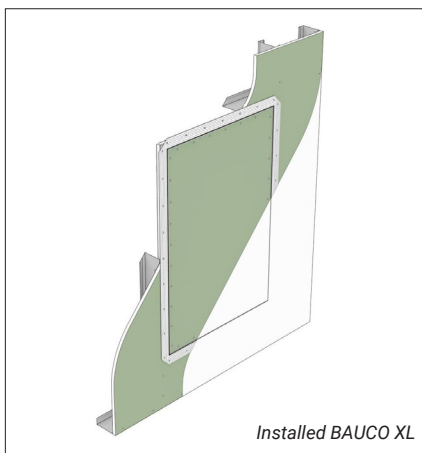


BAUCO XL

Drywall Access Panel with front-mount frame and fixed hinge

PRODUCT INFORMATION

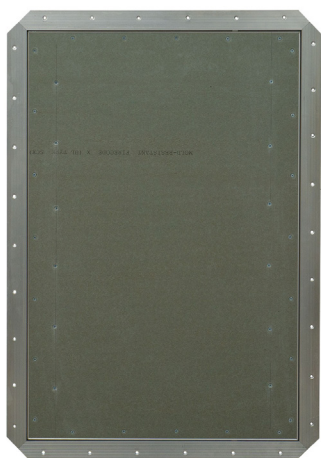

Installed BAUCO XL

APPLICATIONS

- Access openings in drywall walls and ceiling
- Cleanest finish possible required
- Custom sizes, inlays and hardware available.
- Large doors provided in multi-leaf formats with no cross bars between leaves
- Custom sizes up to 22 sq. ft. per single leaf, up to 44sq. ft. double leaf
- Various treatments up to 1/8" above drywall surface possible (by others)
- Areas with sound transmission concerns
- Ideal for large wall access. Great for VTAC access
- Non-fire rated assemblies

DESCRIPTION

- Front-mount frame with integrated drywall bead
- Virtually invisible continuous finish
- Concealed aluminum frame and hardware
- 2mm gap between frame and door leaf
- Steel fixed virtual pivot hinge and safety cable
- Factory installed moisture/mold resistant drywall inlay
- Foam filled bulb gasket
- Maintains STC of standard wall/ceiling assemblies with air tight seal and mass of drywall inlay

SPECIFICATIONS

Frame: 6063-T6 aluminum frame with galvanized steel connectors and hardware

Door leaf: 6063-T6 aluminum frame and moisture and mold resistant drywall inlay

Latch: Concealed mechanical touch latch

Hinge: Concealed steel hinge with variable pivot point for 105° swing. Includes wire braid safety cable

Gasket: Foam filled bulb type perimeter gasket

Standard Latch

- Mechanical touch latch

Latch Options

- Keyed lock
- Cam latch (slotted or torx head)

Standard Finish

- Unfinished drywall inlay installed
- Ready to receive finish on site

Finish Option


- BAUCO Paint-ready. Factory-primed door leaf. Ready to paint.

Standard Inlay


- Moisture and mold resistant drywall

Inlay Options

- Acoustic Board (for enhanced STC)
- Tile Backer
- Blue Board (to bond with plaster veneer)
- Double Layer Drywall
- Plywood

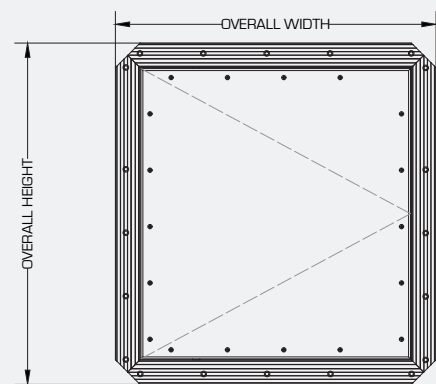


FRONT VIEW

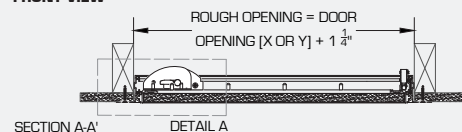

SECTION A-A'

DETAIL A

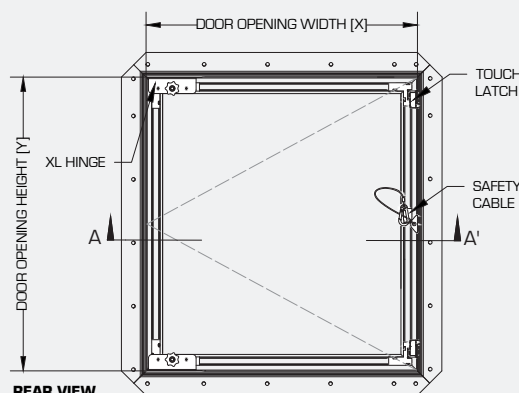

REAR VIEW

Standard Sizes

(Custom sizes available upon request)

Access Panel Size Clear Opening		Weight
Inch	mm	lbs
24 x 36"	610 x 914mm	21
36 x 36"	914 x 914mm	30
24 x 48"	610 x 1219mm	28
48 x 48"	1219 x 1219mm	49
30 x 60"	662 x 1524mm	40
30 x 72"	762 x 1829mm	46

Cut Opening in Drywall = Clear OPENING Size + 1 1/4"
Rough Framed Opening = Clear OPENING Size + 1 1/4"

For detail, see submittal sheet.

Wide range of custom sizes and custom options available. **Call or email to connect.**