

Project Name:
Project Number:

Item Number:
Item Description:


Manufacturer: Bauco Access Panel Solutions Inc.
 Address: 834 Devonshire Road, Victoria, BC Canada V9A 4T4
 Telephone: 1-250-592-0033 Toll-free Telephone: 1-877-592-0033
 Fax: 1-250-592-7587 Toll-free Fax: 1-877-592-7587
 Email: info@accesspanelsolutions.com

Model Number: 20-12-____ *series or 20-58-____ *series

Model Name: **BAUCO® plus II** access panel for drywall

Description: Virtually invisible access panel installs flush with wall and ceiling finishes. Finished panels leave not more than a 1/16" shadow/gap on finished surfaces. Hardware-free finish, opens with concealed touch latches. May be removed for full access, complete with safety catches. Suitable for new construction and repairs. Panels arrive ready for installation with factory installed gypsum board inlay. Door panel receives the same finish as the surrounding surface. Aluminum extrusion with gypsum board installed, no corrosive hardware, safety devices, installation kit, and bracing where needed. Standard: touch latch. Options: keyed latch, special board, acoustic backing. Panel drywall inlay shall equal the same specifications as wall and ceilings.

Finishing: No bead required. Feather mud so that after the 3rd layer no irregularities shall be visible to the unaided eye at a distance of 1.5 m.

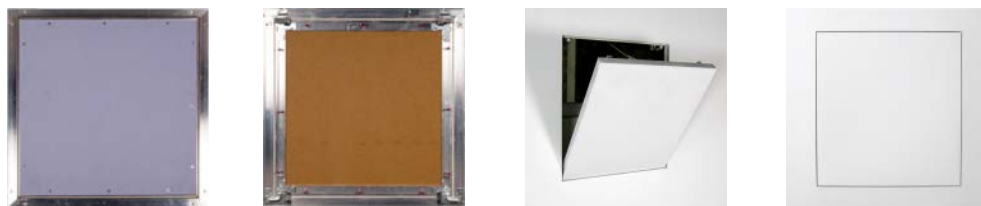

Dimensions: Standard sizes: 6" x 6", 8" x 8", 10" x 10", 12" x 12", 14" x 14", 16" x 16", 18" x 18", 20" x 20", 24" x 24", 24" x 36".
 We can manufacture custom sizes with short lead times.

Sizing: For a proper fit, the rough opening has to be 2 1/2" wider and longer than the door size, to a maximum of 8".
 Cut opening in the gypsum wallboard will be the door size + 3/8".

Notes: * Model Numbers: 12 = 1/2" drywall, 58 = 5/8" drywall.
 ** Last 4 digits indicate panel size: 20-58-1818 = 18" x 18" square panel.